



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE

TARARC™

BLOKTM RC
Series

FRONT




Taramod MA CINCO 250

Fabric Weight : 250 GSM (±5%)

Modacrylic Cellulose base Multi Fiber

BACK

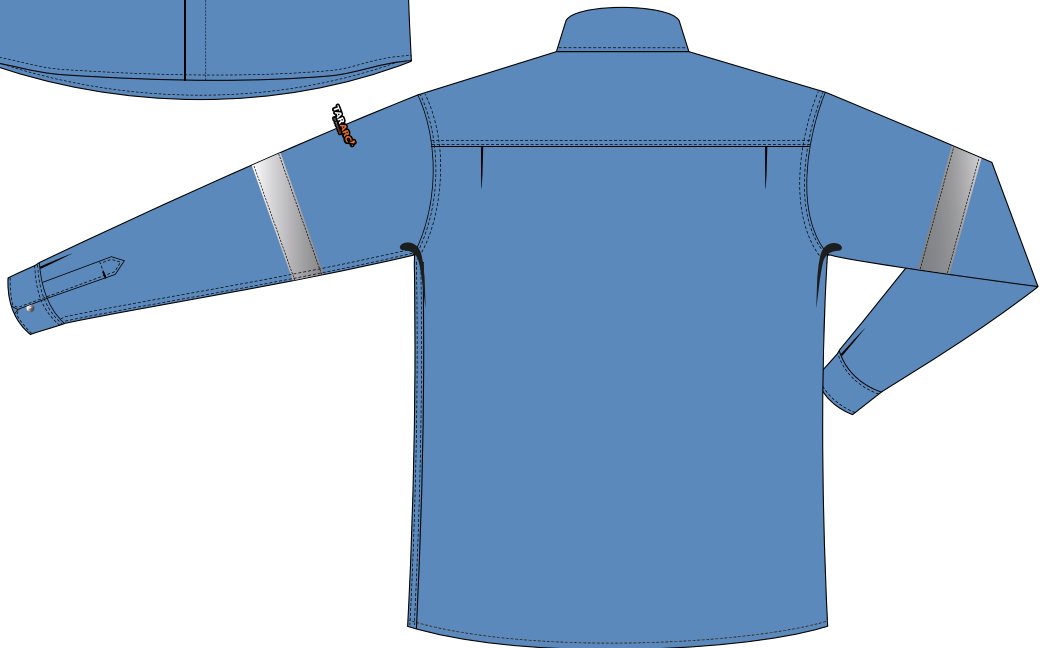

EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1559



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com


ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE

TARARC™


BLOKTM RC
Series

FRONT

Turn down fused collar



Chest pocket with flap and snap closure

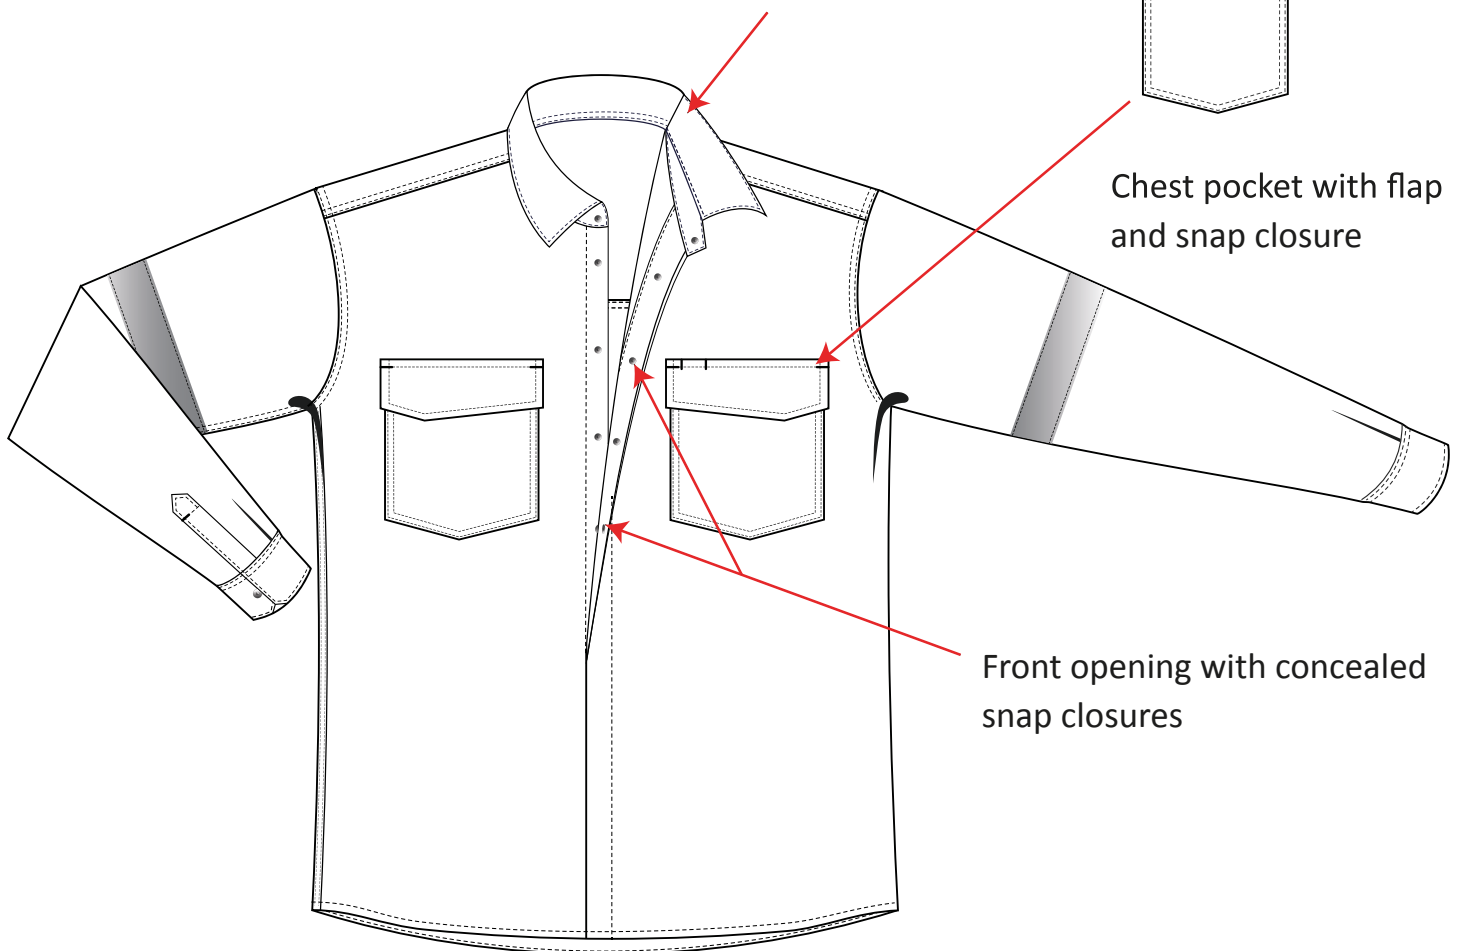

Front opening with concealed snap closures



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE

TARARC™



BLOCKTM RC
Series

BACK

38 mm reflective tape

Action pleat

Cuffs adjustable with snap closing

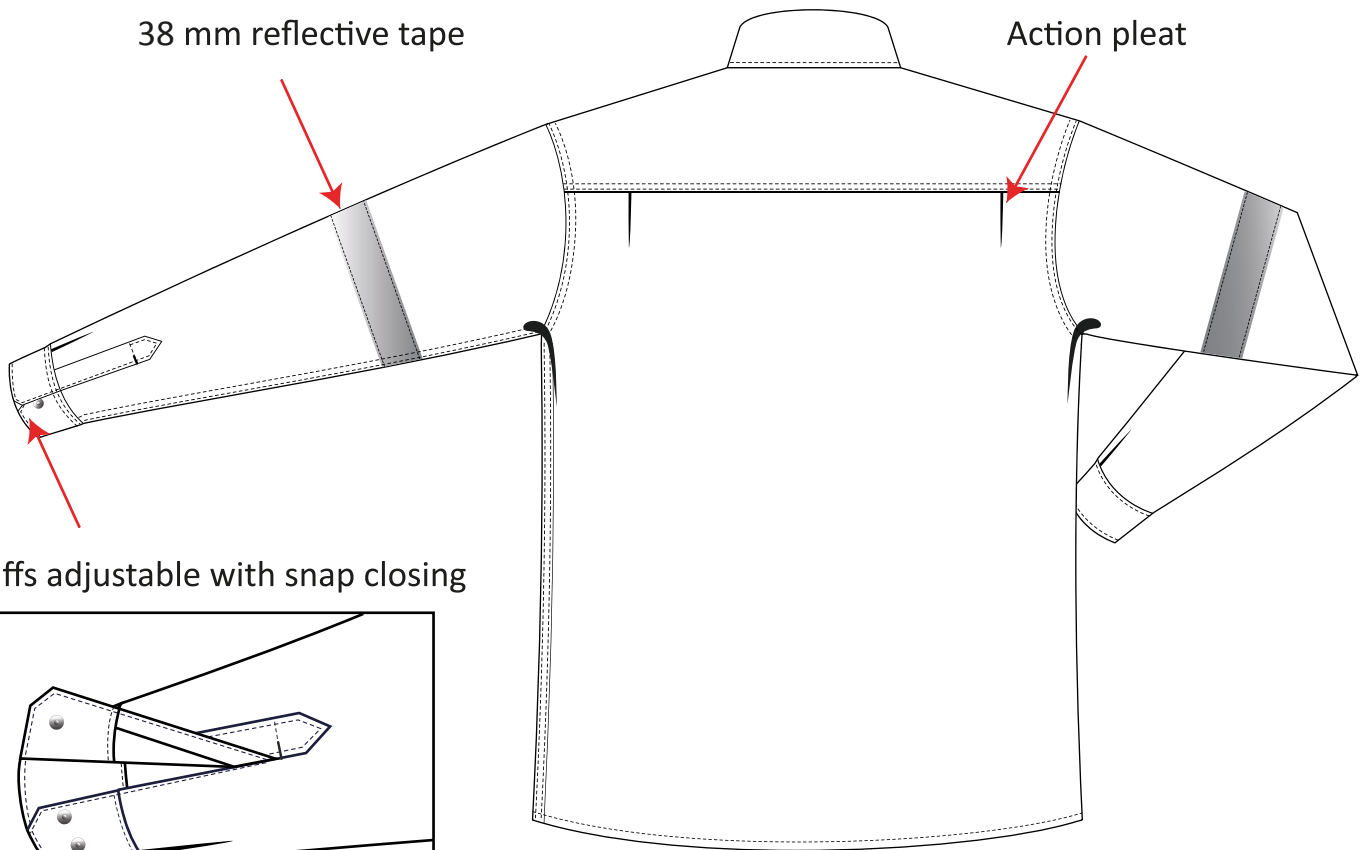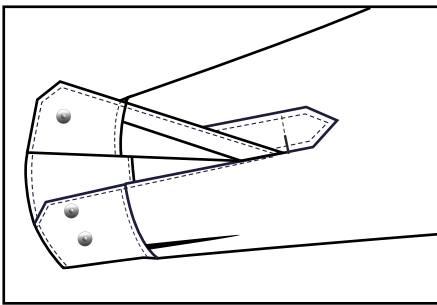

EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
 Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
 E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE



MEASUREMENT CHART - CMS

SIZING: US/EU

Shirt measurement chart (In CMS)								SPEC SHEET : 465		
	Size in CM	Tolerance (in cm)	XS	S	M	L	XL	2XL	3XL	4XL
A	Chest	+/- 1	106	114	122	130	138	146	154	162
B	Across Shoulder	+/- 1	43	46	49	52	55	58	61	64
C	Sleeve length	+/- 1	57	59	61	63	65	67	69	71
D	Front length from joint	+/- 1	67	70	73	76	79	82	85	88
E	Back length	+/- 1	71	74	77	80	83	86	89	92
F	Collar	+/- 0,5	37	39	41	43	45	47	49	51
G	Cuff length without gusset	+/- 0,5	24	25	26	27	28	29	30	31



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
 Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
 E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE



MEASUREMENT CHART - INCHES

SIZING: US/EU

Shirt measurement chart (In Inches)								SPEC SHEET : 465		
	Size in Inches	Tolerance (in cm)	XS	S	M	L	XL	2XL	3XL	4XL
A	Chest	+/- 1	41.7	44.9	48.0	51.2	54.3	57.5	60.6	63.8
B	Across Shoulder	+/- 1	16.9	18.1	19.3	20.5	21.7	22.8	24.0	25.2
C	Sleeve length	+/- 1	22.4	23.2	24.0	24.8	25.6	26.4	27.2	28.0
D	Front length from joint	+/- 1	26.4	27.6	28.7	29.9	31.1	32.3	33.5	34.6
E	Back length	+/- 1	28.0	29.1	30.3	31.5	32.7	33.9	35.0	36.2
F	Collar	+/- 0,5	14.6	15.4	16.1	16.9	17.7	18.5	19.3	20.1
G	Cuff length without gusset	+/- 0,5	9.4	9.8	10.2	10.6	11.0	11.4	11.8	12.2



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel:+971-4-4539779 Fax:+971-4-4539778 DUBAI - UAE
E-mail:info@lotosafetyproducts.com


CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL FEATHERLITE SHIRT - MID BLUE

TARARC™

BLOKARC™
Series

ARC FLASH 12 CAL FEATHERLITE SHIRT - LABEL

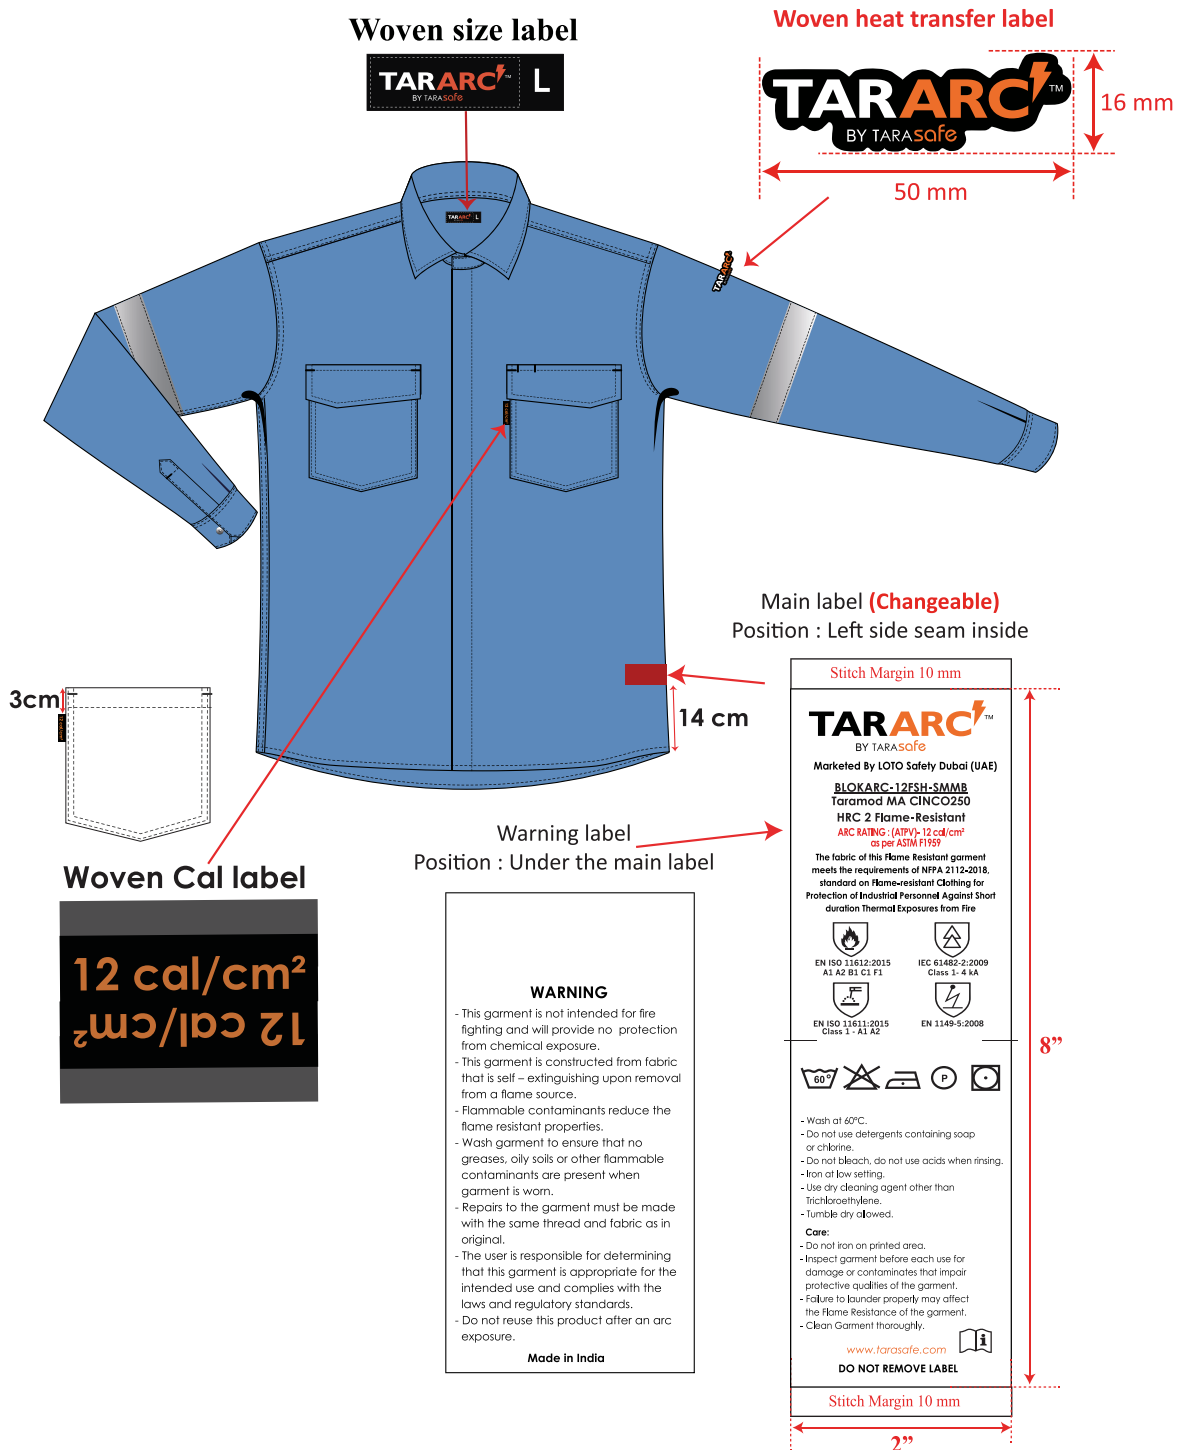



LOTO SAFETY REQUISITES TRADING L.L.C.
 Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
 E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

FABRIC SPECIFICATION SHEET



TARAMOD™ MA CINCO 250 (94109)

TaraMod™ is a range of inherently flame retardant Modacrylic and Cellulose blended protective clothing, with outstanding resistance to chemicals and solvents

LIGHT WEIGHT SELF-EXTINGUISHING SOFT GOOD HANDLE NON ALLERGIC

TECHNICAL CHARACTERSTICS

WEAVE	Rip Stop
WEIGHT	250 GSM (±5%)

PARAMETERS	STANDARD	WARP	WEFT
TENSILE STRENGTH	EN ISO 13934-1	650 N	400 N
TEAR STRENGTH	EN ISO 13937-2	25 N	20 N
DIMENSIONAL STABILITY (60°C)	EN ISO 6330:2000-6N/ ISO 5077:2007	± 3%	± 3%
HEAT SHRINKAGE (180±5°C)	ISO 17493:2000	<5%	
COLOR PERFORMANCE	ISO 105 C06	Grade 3 - 4	
CARE INSTRUCTION			

NORMS	PARAMETERS	
	Flame spread: ISO 15025	A1
	Convective Heat: ISO 9151	B1
	Radiant Heat: ISO 6942	C1
	Contact Heat: ISO 12127	F1
	Welding Application	Class 1 - A1
	Electrostatic Dissipative Charges	Met
	Electric arc Protection	Class 1
	Protection for Electrical Safety - ASTM F 1959	ATPV: 12 cal/cm ²