



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL JACKET - NAVY BLUE

TARARC™

BLOCKTM RC
Series

FRONT



Taramod MA CINCO 250

Fabric Weight : 250 GSM (±5%)

Modacrylic Cellulose base Multi Fiber

BACK



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL JACKET - NAVY BLUE

TARARC™


BLOCK RC™
Series

Centre front opening
with quick release plastic
zipper & plastic snap buttons



Chest pocket with flap and
plastic snap closure

Piping

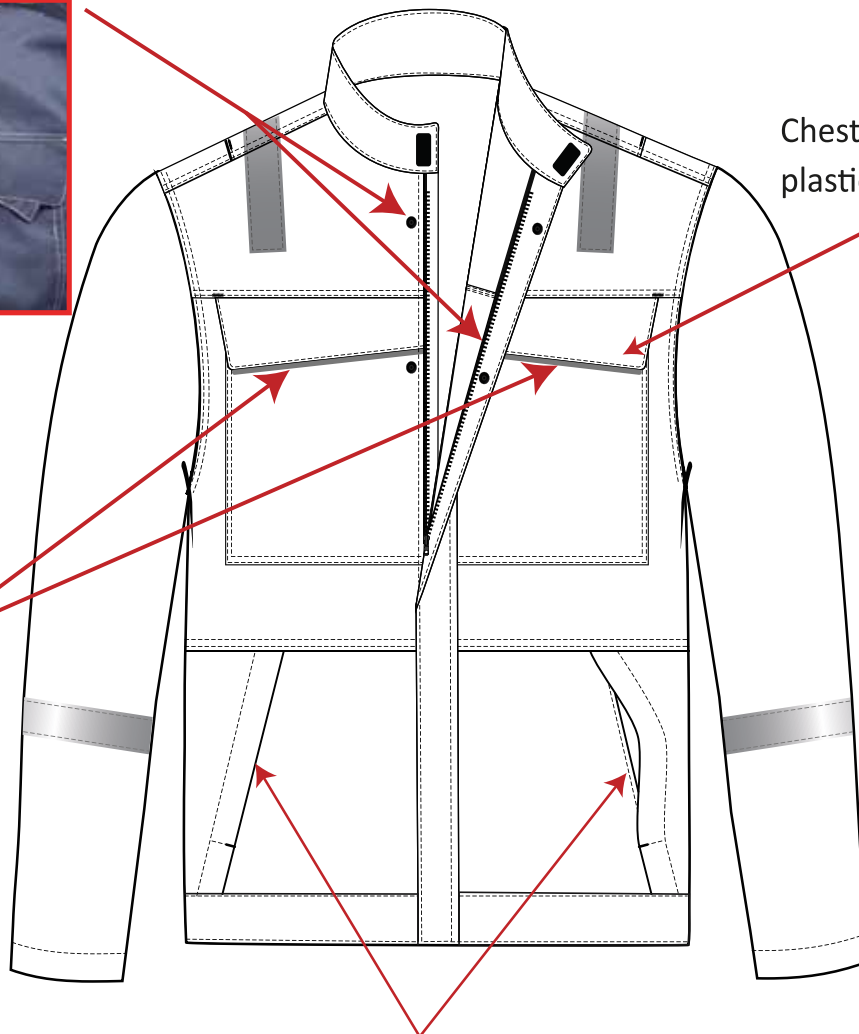

2 down pockets with flap



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.

Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
E-mail: info@lotosafetyproducts.com


CALL US TODAY: +971-50-5843270

www.lotosafetyproducts.com

ARC FLASH 12 CAL JACKET - NAVY BLUE

TARARC™

BLOKTM RC
Series

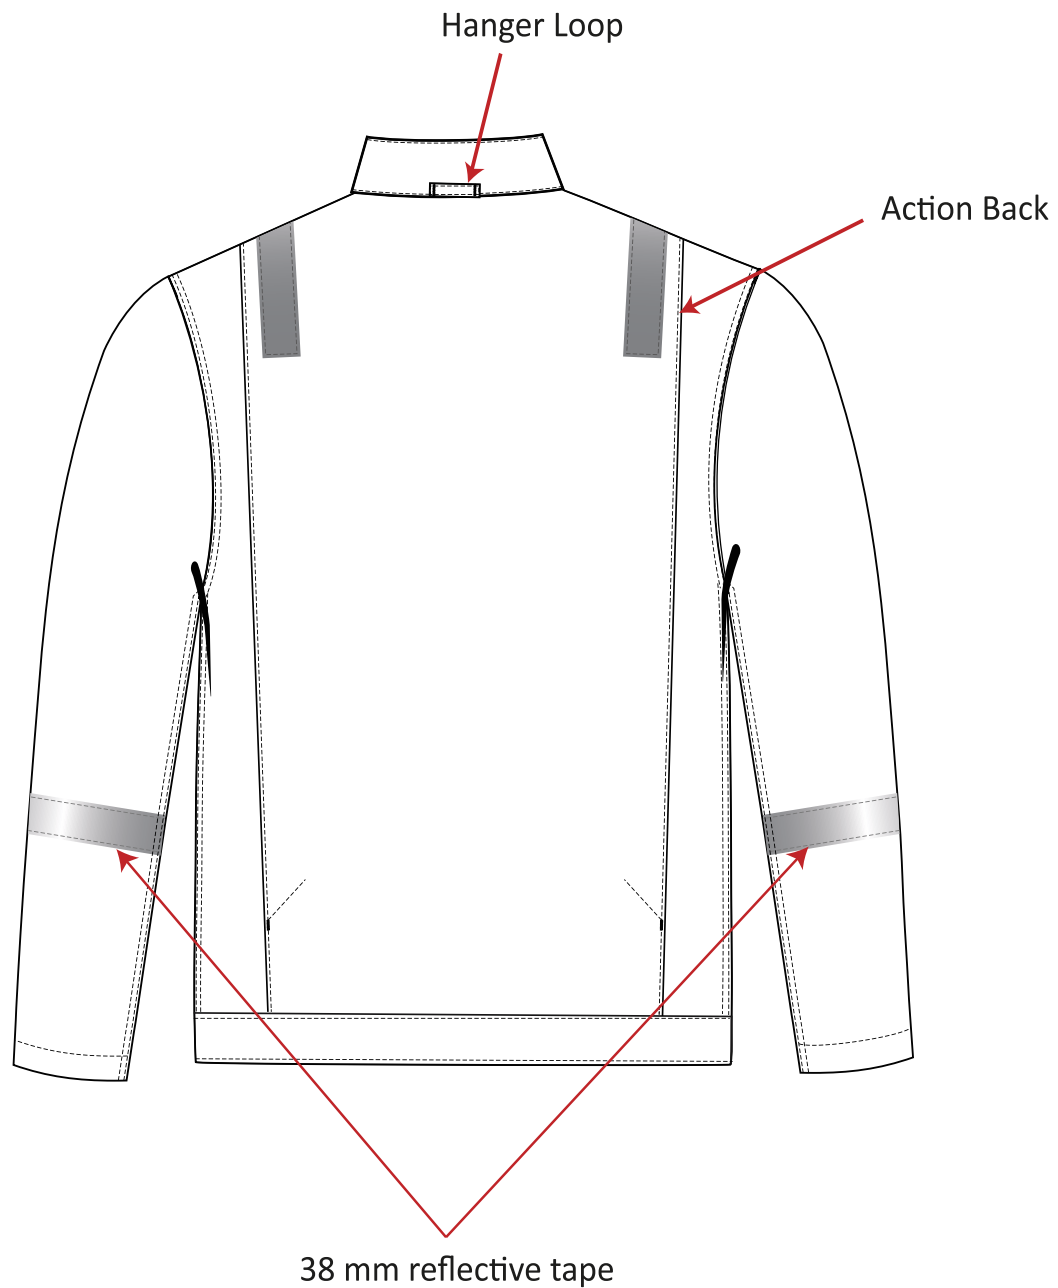

EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel:+971-4-4539779 Fax:+971-4-4539778 DUBAI - UAE
E-mail:info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL JACKET - NAVY BLUE



MEASUREMENT CHART - CMS

SIZING: US/EU

Jacket (Measurement in CMS)					Spec Sheet-353			
POINT OF MEASUREMENT	<u>XS</u>	<u>S</u>	<u>M</u>	<u>L</u>	<u>XL</u>	<u>2XL</u>	<u>3XL</u>	<u>4XL</u>
BOTTOM SWEEP - FLAT (WAIST)	53.3	55.9	58.4	61.0	63.5	66.0	68.6	71.1
LENGTH HPS	73.7	76.2	78.7	81.3	83.3	86.4	89.0	91.5
CHEST	54.0	56.5	59.1	61.6	64.3	66.7	69.3	71.8
WIDTH ACROSS SHOULDER	48.3	50.2	52.1	54.0	55.9	58.4	61.0	63.5
SLEEVE LENGTH FROM SHOULDER SEAM INC CUFF	60.0	60.1	61.3	61.9	62.2	62.6	62.9	63.2



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.
Tel:+971-4-4539779 Fax:+971-4-4539778 DUBAI - UAE
E-mail:info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

ARC FLASH 12 CAL JACKET - NAVY BLUE



MEASUREMENT CHART - INCHES

SIZING: US/EU

Jacket (Measurement in Inches)							Spec Sheet-353	
POINT OF MEASUREMENT	<u>XS</u>	<u>S</u>	<u>M</u>	<u>L</u>	<u>XL</u>	<u>2XL</u>	<u>3XL</u>	<u>4XL</u>
BOTTOM SWEEP - FLAT (WAIST)	21.0	22.0	23.0	24.0	25.0	26.0	27.0	28.0
LENGTH HPS	29.0	30.0	31.0	32.0	33.0	34.0	35.0	36.0
CHEST	21.3	22.3	23.3	24.3	25.3	26.3	27.3	28.3
WIDTH ACROSS SHOULDER	19.0	19.8	20.5	21.3	22.0	23.0	24.0	25.0
SLEEVE LENGTH FROM SHOULDER SEAM INC CUFF	23.6	23.9	24.1	24.4	24.5	24.6	24.8	24.9



EN ISO 11612



EN ISO 11611



EN 1149-5



EN 61482-1-2



NFPA 70E



ASTM F1959



LOTO SAFETY REQUISITES TRADING L.L.C.

Tel:+971-4-4539779 Fax:+971-4-4539778 DUBAI - UAE

E-mail:info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270

www.lotosafetyproducts.com


ARC FLASH 12 CAL JACKET - NAVY BLUE

TARARC™

BLOK ARC™
Series

ARC FLASH 12 CAL JACKET - LABEL

Woven label 2.5cm
down from collar

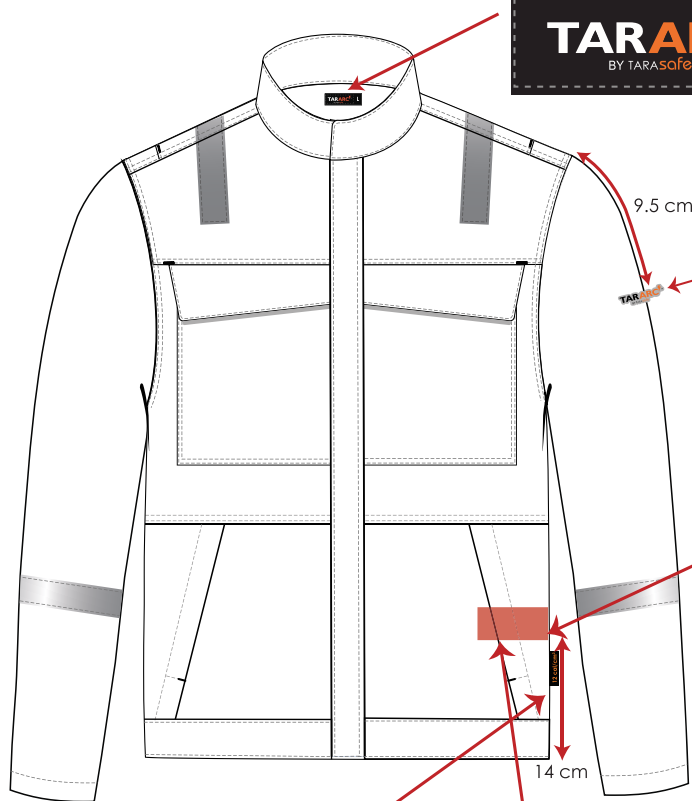


Damasc heat transfer label




Main label (Changeable Size wise)

Position : Left Side seam


Stitch Margin 10 mm

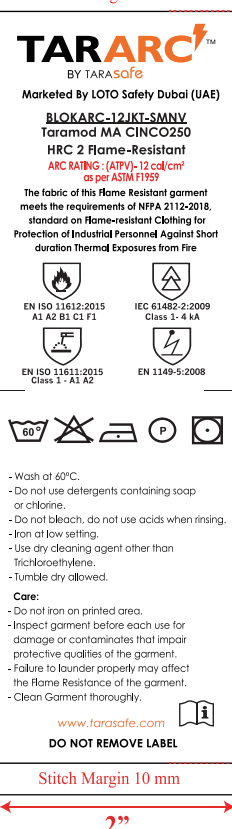

Cal label (Woven)



Warninglabel

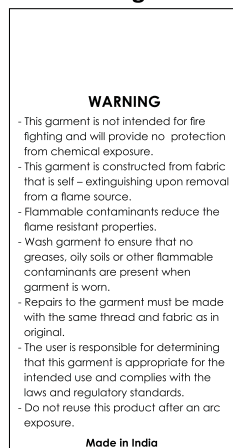



LOTO SAFETY REQUISITES TRADING L.L.C.
 Tel: +971-4-4539779 Fax: +971-4-4539778 DUBAI - UAE
 E-mail: info@lotosafetyproducts.com

CALL US TODAY: +971-50-5843270
www.lotosafetyproducts.com

FABRIC SPECIFICATION SHEET

TARARC™

BLOK RC™
 Series

TARAmod™
 Modacrylic

TARAMOD™ MA CINCO 250 (94109)

TaraMod™ is a range of inherently flame retardant Modacrylic and Cellulose blended protective clothing, with outstanding resistance to chemicals and solvents

LIGHT WEIGHT

SELF-EXTINGUISHING

SOFT

GOOD HANDLE

NON ALLERGIC

TECHNICAL CHARACTERISTICS

WEAVE	Rip Stop
WEIGHT	250 GSM (±5%)

PARAMETERS	STANDARD	WARP	WEFT
TENSILE STRENGTH	EN ISO 13934-1	650 N	400 N
TEAR STRENGTH	EN ISO 13937-2	25 N	20 N
DIMENSIONAL STABILITY (60°C)	EN ISO 6330:2000-6N/ ISO 5077:2007	± 3%	± 3%
HEAT SHRINKAGE (180±5°C)	ISO 17493:2000	<5%	
COLOR PERFORMANCE	ISO 105 C06	Grade 3 - 4	
CARE INSTRUCTION	    		

NORMS	PARAMETERS	
	Flame spread: ISO 15025	A1
	Convective Heat: ISO 9151	B1
	Radiant Heat: ISO 6942	C1
	Contact Heat: ISO 12127	F1
	Welding Application	Class 1 - A1
	Electrostatic Dissipative Charges	Met
	Electric arc Protection	Class 1
	Protection for Electrical Safety - ASTM F 1959	ATPV: 12 cal/cm ²